

PRODUCT DATA SHEET

MicroSENS Hightemp IR carbon dioxide sensor

MicroHybrid gas sensor for reliable
and accurate CO₂ measurement in incubators




MH-100

This IR CO₂ sensor has been specially optimized for the measurement of 5 Vol-% CO₂ in cell incubators to manage ideal cell and tissue growth.

The sensor can be placed directly in the incubation chamber to measure the exact cell experienced environment. It determines the CO₂ concentration based on its characteristic infrared absorption.

ADVANTAGES

- IR dual beam technology
- Temperature and pressure compensated
- Heat-sterilizable up to 190° C
- Long lifetime
- Humidity correction

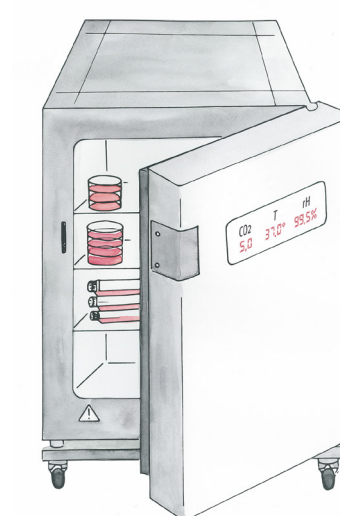



Technical specification

General	
SKU	MH-100
Measuring gas	CO ₂
Measurement range	0 – 20 Vol.-%
Gas supply	Diffusion
Warm up time	< 1 minute (start-up) < 15 minutes (full spec)

Measurement	
Accuracy ¹	± 0,2 Vol.-% ± 2 % of reading
Response time (t ₉₀)	≤ 30 s
Digital resolution	0,001 Vol.-%
Temperature dependence ²	≤ ± 0,1 Vol.-%
Pressure dependence ³	≤ ± 0,05 Vol.-%
Long term stability ⁴	≤ ± 0,2 Vol.-% at 5 Vol.-% / year
Humidity correction	0 ... 200 hPa H ₂ O

Electrical	
Supply voltage	12 – 24 V _{DC}
Power consumption	< 2 W
Digital output	RS232, Micro-Hybrid industrial protocol
Analogue output	4 – 20 mA

Climatic conditions	
Operating temperature	0° C ... 60° C
Humidity	< 100 % relative humidity (rH), not condensing
Storage temperature	-25° C ... 85° C
Maximum temperature for heat sterilization (only sensor) ⁵	190° C

¹ at 37° C, 1013 hPa, dry test gas, excludes calibration gas tolerance of ± 1 %

² with compensation at 1 Vol.% ... 20 Vol.% CO₂ and 20° C ... 60° C, 1013 hPa

³ with compensation at 600 – 1200 hPa, 37° C and 5 Vol.-% CO₂

⁴ stability at 37° C, without heat sterilization

⁵ maximum humidity ≤ 1 % rH, ≥ 85° C auto standby – no CO₂ measurement